# floor models

### Why are the floor joists flat vs. on edge?

**Structural Integrity** – Flat joists mean more holding power by face-nailing floor joists to 4x4" runners vs. toe-nailing.

Larger support area – Actual distance between floor joists is only 12½".

Ease of use – User friendly minimal step up into building.




## **Standard Model**

#### Floor:

3/4" CDX Plywood 16" O.C. floor joists 4x4" treated skids

Walls: 24" O.C. wall studs

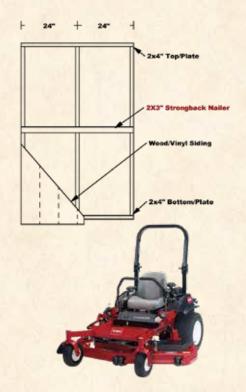




## **Deluxe Model**

#### Floor:

3/4" ProStruct Flooring 16" O.C. treated floor joists 4x4" treated skids

Walls: 16" O.C. wall studs

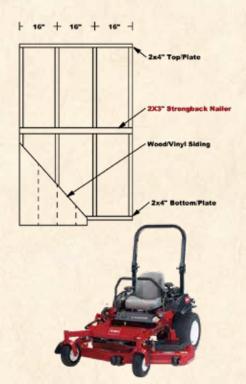



## **Supreme Model**

#### Floor:

2x6" Treated Tongue & Groove 4x4" treated skids

Walls: 16" O.C. wall studs

